

uPVC BIFOLD DOORS QUOTE/ORDER FORM

TRADE
ORDER FORM
JUNE 2019

Enquiry please quote

Order please process

Date Of Order _____ **Date Required** _____

Contact Details

Ordered By _____

Company Name _____

Address _____

_____ **Postcode** _____

Tel _____

Email _____

Order No. _____

Your Reference _____

Delivery Date Requested _____

Standard colours

Agate Grey out/White in Anthracite Grey out/White In

Anthracite Grey both sides (white base)

Smooth Anthracite Grey out/White In

Smooth Anthracite Grey both sides (white base)

Beck Brown out/White in Chartwell Green out/ White in

Cream out/white in Golden Oak out/White in

Golden Oak out/Caramel in Rosewood out/White in

Rosewood out/Brown in White foil both sides

Smooth White both sides

Other, please specify _____

Overall frame width (mm) _____

Overall frame height (mm) _____

These overall sizes must include any cill or add-ons requested.

Note: Finished sizes must allow minimum 10mm tolerance between overall frame sizes and aperture.

Opening direction

Inward

Outward

Glazing

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

Glazed

Unglazed

PAS24 required. Laminated glass will be supplied.

Keyed Alike



Ulltron cylinder lock fitted as standard

Optional extras (please tick box)

Frame extension to head	15mm	30mm	45mm
Frame extension to base		30mm	45mm
Frame extension 30mm	Left	Right	
Frame extension 45mm	Left	Right	
Bead – black gasket with chamfered bead	28mm	36mm	
		Featured (Available with 28mm glazing only)	

65mm threshold (Standard)

Weathered

Aluminium low threshold 30mm

Weathered – not suitable with a cill

Aluminium room divider 15mm

Not weathered

Doc. M compliant ramp Internal External

Night ventilator in 45mm Yes

Glazing packer set Touch-up pen

Cill requirement included in overall frame height

95mm 150mm 180mm No cill required

Handles – Master door only

White Black Chrome Gold

Intermediate Handle

White Black Chrome Gold


D Hinge

White Black

Hinges

White Black

Opening configuration – viewed from outside

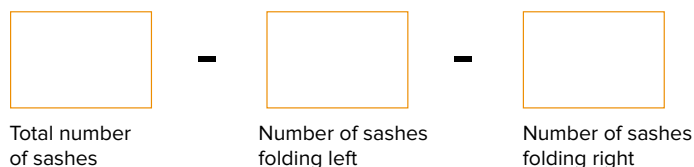

uPVC BIFOLD DOORS

QUOTE/ORDER FORM

PRODUCT GUIDELINES

Features & benefits

- Multiple opening options. Up to 90% of glazed screen can be opened.
- 2, 3, 4, 5, 6 or 7 panel options can fold in or out and slide towards left or right. Optional traffic door only available on certain configurations.
- BS 6375, PAS 23 and PAS 24 certified.
- Extreme weather tested on standard and low thresholds.
- Multipoint high security locking with shootbolts.
- All folding and sliding doors include heavy duty rollers & anti-jemmy wheels.
- Aluminium low threshold 30mm high, requires ramps for wheelchair access (fully Document M compliant). Not suitable with cill.
- Aluminium room divider 15mm high (internal use only).
- 28mm glazing as standard.
- 10-year guarantee*
- We strongly recommend dark coloured doors are not situated on south facing elevations due to thermal expansion which may effect the opening/closing action of the door.
- Ultion cylinder fitted as standard.

Size & weight restrictions

	Maximum	Minimum
Height:	2213mm	1950mm
Overall width:	6000mm	1370mm
Panel width:	1000mm	600mm
Weight per panel:	80kg	

Door has to comply with Document Q of the Building Regulations (additional costs apply for the SBD specification product)

Prior to delivery all KAT folding and sliding doors will be fully assembled and their operation carefully checked.

Doors must be installed fully square and level, glass packed and toe and heeled correctly to ensure smooth operation. Full installation instructions are supplied with every door and can be found on our website.

*10 year guarantee on profile operation.
1 year on hardware. Subject to our standard terms and conditions.


Configuration options

All style numbers shown below can be manufactured to open in the opposite direction.


For example, style 3-2-1 can be reverse handed to 3-1-2.

On these styles, there is no traffic door and doors can only be opened from the inside of the property.


2 - 0 - 2




3 - 3 - 0




3 - 2 - 1




4 - 1 - 3




4 - 4 - 0 #




4 - 2 - 2 #




5 - 5 - 0




5 - 4 - 1




5 - 3 - 2




6 - 1 - 5

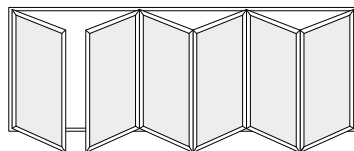


6 - 3 - 3

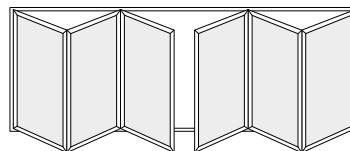

6 - 6 - 0 #

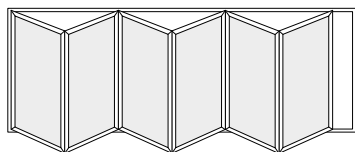

6 - 2 - 4 #

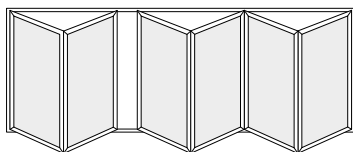

7 - 7 - 0

