

# PVCu BIFOLD DOORS ORDER FORM - VEKA IMAGINE

**TRADE**  
Enquiry/Order Form  
Jan 2018  
V1.JAN18

Enquiry please quote

Order please process

Date \_\_\_\_\_

## Contact Details

Ordered By \_\_\_\_\_

Company Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Telephone \_\_\_\_\_

Email \_\_\_\_\_

Order No. \_\_\_\_\_

Your Reference \_\_\_\_\_

Delivery Date Requested \_\_\_\_\_

## Site Contact

Contact Name \_\_\_\_\_

Delivery Address \_\_\_\_\_

Postcode \_\_\_\_\_

Telephone \_\_\_\_\_

## Standard colours

White	Beck brown on white
Rosewood	Anthracite grey on white
Rosewood on white	Anthracite both
Golden oak	Chartwell green on white
Golden oak/Cherry on white	White foil
Irish oak on white	Other (please specify)
Irish oak	6 week lead time
Cream both	
Cream on white	

Overall frame width (mm) \_\_\_\_\_

Overall frame height (mm) \_\_\_\_\_

These overall sizes must include any cill or add-ons requested.

Note: Finished sizes must allow minimum 10mm tolerance between overall frame sizes and aperture.

Opening direction Inward Outward

Glazing Glazed Unglazed

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

**Door complies with Document Q of the Building Regulations. KAT Veka bifold PAS:24 as standard 6.8mm laminated glass must be specified.**

## Optional extras (please tick box)

Keyed alike \_\_\_\_\_

Frame extension to head  
15mm      30mm      45mm

Frame extension to base  
30mm      45mm

Frame extension 30mm  
Left      Right

Frame extension 45mm  
Left      Right

Bead - Black gasket (Chamfered)  
28mm      36mm

65mm threshold weather rated

30mm Aluminium low threshold -  
Part M compliant if ramps are selected.

External      Internal

15mm Aluminium low threshold non-weather rated room  
divider - not suitable with a cill

Night ventilator in 45mm add-on

Glazing packer set

Touch-up pen

## Cill requirements included in overall frame height

95mm      180mm  
150mm      No cill required

## Handles - master door only

White      Chrome  
Black      Polished gold


## Intermediate handle

White      Chrome  
Black      Polished Gold

## Hinges

White      Black

## Opening configuration - viewed from outside

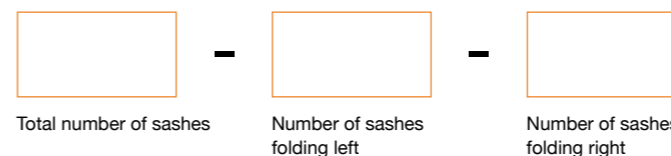

## Size and weight restrictions

	Maximum	Minimum
Height:	2300mm	1950mm
Overall width:	6000mm	1370mm
Panel width:	900mm	600mm
Weight per panel:	80kg	

Prior to delivery, all KAT folding and sliding doors are fully assembled and their operation is carefully checked. Doors must be installed fully square and level, glass packed and toe and heeled correctly to ensure smooth operation. Full installation instructions are available and can be found on our website.

\*10-year guarantee on profile operation. 2 years on hardware. Sale is subject to our standard terms and conditions.

## Configuration options

All style numbers shown below can be manufactured to open in the opposite direction. For example, style 3-2-1 can be reverse handed to 3-1-2.

## Features and benefits

- Multiple opening options. Up to 90% of glazed screen can be opened.
- 2, 3, 4, 5, 6 or 7 panel options can fold in or out and slide towards left or right. Optional traffic door only available on certain configurations.
- BS 6375, PAS 23 and PAS 24 certified.
- Weather tested on standard and 30mm low thresholds.
- Multipoint high security locking with shootbolts.
- All folding and sliding doors include heavy duty rollers & stainless steel anti jemmy pins.
- Aluminium low threshold 30mm high, requires ramps for wheelchair access (fully Document M compliant). Not suitable with cill.
- Aluminium room divider 15mm high (internal use only).
- 28mm glazing as standard.
- 10-year guarantee\*
- **Dark coloured doors must not be installed on south facing elevations due to thermal expansion which may affect the opening/closing action of the door.**

# On these styles, there is no traffic door and doors can only be opened from the inside of the property.

